
HP Jet Fusion 580 Color 3D Printer



Produce functional parts in full color—with voxel control—in a fraction of the time¹

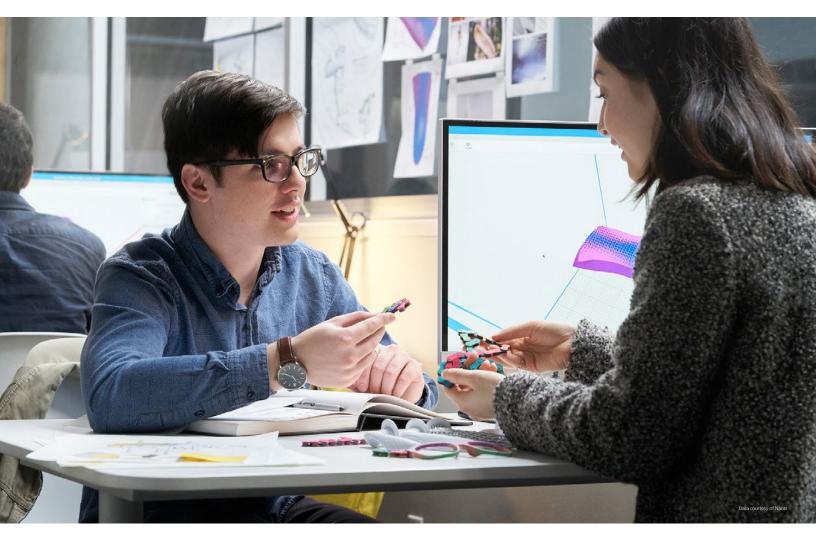

Full spectrum color parts with voxel control

- Produce brilliant, full-color functional parts while maintaining optimal mechanical properties.
- Stay ahead with a future-ready technology.
- Prototype and produce functional parts, averaging up to 100 parts per week.²

Accurate, functional parts with intricate detail

- Produce engineering-grade thermoplastic parts with optimal mechanical properties.
- Achieve fine detail and high dimensional accuracy for small features.
- Get accurate and repeatable results.

Accelerate design—create, test, iterate in hours

- Produce multiple prototype iterations in the same time it takes to print a single part.¹
- Access convenient in-house automated 3D printing with the most compact HP Jet Fusion 3D device.
- Get the parts you want when you need them, easily, reliably, and predictably with immediate access to support.
- Prototype, then do final part production on the HP Jet Fusion 4200 3D Printing Solution, using the same technology.

A fully integrated, compact design

An easy-to-use solution that integrates material mixing and loading, printing, and reclaiming material in one device.








Data courtesy of Phoenix Children's Hospital: Heart of Jemma



Reinventing 3D printing

HP Jet Fusion 580 Color 3D Printer

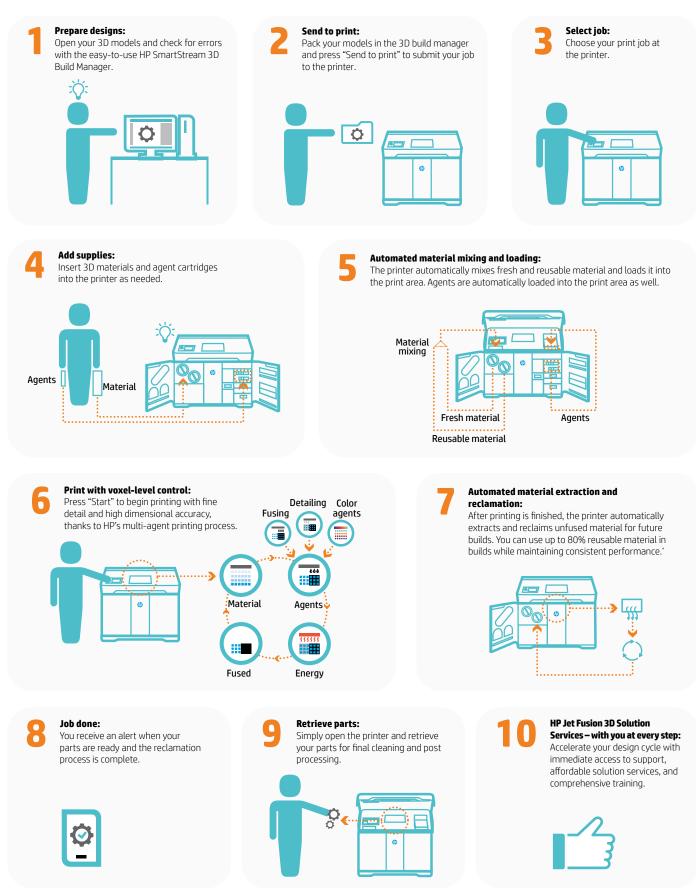

*HP Jet Fusion 3D Printing Solutions using HP 3D High Reusability CB PA 12 provide up to 80% powder reusability ratio, producing functional parts batch after batch. For testing, material is aged in real printing conditions and powder is tracked by generations (worst case for reusability). Parts are then made from each generation and tested for mechanical properties and accuracy.

Technical information

| Printer | Technology | HP Multi Jet Fusion technology | |
|---------------------------|---|---|--|
| performance | Effective building volume | Up to 332 x 190 x 248 mm (13.1 x 7.5 x 9.8 inches) | |
| | Building speed ³ | 1,817 cm³/hr (111 in³/hr) | |
| | Full build job time for 248-mm (9.8-in) buildable height ⁴ | As fast as 20 hours | |
| | Layer thickness | 0.08 mm (0.003 inches) | |
| | Printhead resolution | 1200 dpi | |
| Dimensions (w x d x h) | Printer | 1565 x 955 x 1505 mm (61.6 x 37.6 x 59.3 inches) | |
| | Shipping | 1770 x 1143 x 2013 mm (69.7 x 45 x 79.3 inches) | |
| | Operating area | 2785 x 2530 x 2440 mm (109.6 x 99.3 x 96 inches | |
| Weight | Printing | 650 kg (1433 lb) | |
| | Shipping | 850 kg (1874 lb) | |
| Environmental ranges | Operating temperature | 20-30° C (68-86° F) | |
| | Operating humidity | 20-70% RH without condensation | |
| Acoustics⁵ | Front operating position | 72 dB (without muffler) / 70 dB (with muffler) | |
| | Rear bystander position | 80 dB (without muffler) / 75 dB (with muffler) | |
| Network ⁶ | Gigabit Ethernet (10/100/1000Base-T), supporting the following standards: TCP/IP, DHCP (iPv4 only), TLS/SSL) | | |
| Hard disk | HDD 1TB (AES-256 encrypted, disk wipe DoD 5520M) & SSD 1TB (AES-256 encrypted) | | |
| Software | Included software | HP SmartStream 3D Build Manager | |
| | | HP SmartStream 3D Command Center | |
| | Supported file formats | 3MF, STL, OBJ, VRML v.2 | |
| Power | Consumption | 4.5-6.3 kW (typical) | |
| | Requirements | One dedicated circuit configuration: input voltage 200 - 240 V (line-to-line), 36 A max, 50/60 Hz | |
| Certification | Safety | NA (US & Canada): IEC 61010-1 compliant, NRTL certified; EU: Machinery Directive, EN 61010-1, EN 60204-1, EN ISO 12100 and EN ISO 13849-1 compliant | |
| | Electromagnetic compatibility | EN 55032:2012 Class A; CISPR 32:2012 Class A; FCC CFR 47 Part 15 Class A; ICES-003, Issue 6 Class A; EN 61000-3-12:2011; IEC 61000-3-12:2011; EN 61000-3-11:2000; IEC 61000-3-11:2000; EN 55024:2010; CISPR 24:2010 | |
| | Environmental | REACH compliant | |
| Warranty & service | One-year limited hardware warranty | | |

| Printer | M2K85A | HP Jet Fusion 580 Color 3D Printer |
|--|---------------------------|---|
| Original HP | V1Q67A | HP 3D400 Printhead Kit |
| printheads | V1Q76A | HP 3D450 Color Printhead Kit |
| Printer accessories | 5RD52A | HP Jet Fusion Muffler |
| Recommended cleaning accessories *Please consult with your | Guyson MultiBlast3D | HP Recommended Bead & Air Blast Solution* (Recommended for EMEA and AMS regions) |
| local HP Partner First 3D Printing Specialist | Delfin 300 BL | HP Recommended Explosion-Proof Vacuum. Promotional code*: ESD.EX22-0299 (Recommended for EMEA region) |
| | Tiger-Vac C-10 EX (4W) | HP Recommended Explosion-Proof Vacuum. Promotional code*: TVC-111805A-HP2 (Recommended for AMS region) |
| Original HP agents | V1Q80A | HP 3D400 500-ml Detailing Agent |
| | V1Q70A | HP 3D450 250-ml Black Agent |
| | V1Q71A | HP 3D400 500-ml Fusing Agent |
| | V1Q81A | HP 3D400 250-ml Bright Fusing Agent |
| | V1Q73A | HP 3D450 250-ml Yellow Agent |
| | V1Q74A | HP 3D450 250-ml Magenta Agent |
| | V1Q75A | HP 3D450 250-ml Cyan Agent |
| Original HP 3D high reusability materials | V1R30A | HP 3D HR CB PA 12 10L (4 kg) ⁷ |
| HP Jet Fusion 3D | U9ZR4E | HP Ready-to-print Service |
| Solution Services | U9ZN9E | HP Advanced Operation Training (HP Training Center) |
| | U9ZP2E | HP 3 year 2nd Business Day onsite Hardware Support w/DMR |
| HP 3D long-term | U9ZR1E | HP 3D400 Air Inlet Filter |
| consumables | U9ZR2E | HP 3D400 Print Area Filter |
| | U9ZR3E | HP 3D400 Air Exhaust Filter |
| | U9ZR5E | HP 3D400 Printhead Cleaning Roll |
| | U9ZR6E | HP 3D400 Lamp Module |



reddot award 2018





HP Jet Fusion 500 Series 3D Printers were awarded the "Seal of Design Quality" at the 2018 Red Dot Awards,

an honor that is only awarded to products that display

outstanding design quality and innovation.



Dynamic security enabled printer. Only intended to be used with cartridges using an HP original chip. Cartridges using a non-HP chip may not work, and those that work today may not work in the future. More at: hp.com/go/learnaboutsupplies

Eco Highlights

coverage included

- HP 3D powders and agents are not classified as health hazards⁸
- Cleaner, more comfortable experience—enclosed printing system, and automatic powder management⁹
- Minimizes waste due to industry-leading reusability of powder¹⁰
- Take-back program for agent cartridges¹

Find out more about HP sustainable solutions at hp.com/ecosolutions

Connect with an HP 3D Printing expert or sign up for the latest news about HP Jet Fusion 500 Series 3D Printers at <u>hp.com/go/3DPrinter580</u> Learn more about HP Multi Jet Fusion technology at <u>hp.com/go/3DPrint</u>

- Based on internal and third-party testing for HP Jet Fusion 580 Color and 540 3D Printers, printing and cooling time is a fraction of the time of the printing times of comparable plastic fused deposition modeling (FDM), stereolithography (SLA), and material jetting solutions from \$20,000 USD to \$120,000 USD on market as of June, 2017. Testing variables for the HP Jet Fusion 580 Color 3D Printer: Part quantity: 1 full build chamber of parts from HP Jet Fusion 3D at 10% of packing density versus same number of parts on above-mentioned competitive devices; Part size: 30 cm³; Layer thickness: 0.08 mm/0.003 inches. Competitor testing variables are comparable.
- Assuming 220 working days of 30 cm³ parts at a 10% packing density using HP 3D High Reusability CB PA 12 material, and up to 80% powder reusability ratio.
- 3. Based on 0.08-mm (0.003-in) layer thickness and 10 sec/layer.
- 4. Assumes default "Auto Cool and Reclaim" print mode. Job duration begins at the moment the job is selected to print at the control panel and ends at the time the parts are ready to be removed from the build chamber. Does not include part cleaning.
- Measurement positions conform to ISO 11201-2010 for machinery, 1.0 meters horizontally and 1.55 meters above the floor.

- 6. The HP Jet Fusion 3D Printing Solution should be connected to the HP Cloud in order to enable the correct functioning of the printer and to offer better support.
- Liters refers to the materials container size and not the actual materials volume. Materials are measured in kilograms.
- 8. The HP powder and agents do not meet the criteria for classification as hazardous according to GHS and Regulation (EC) 1272/2008 as amended.
- Compared to manual print retrieval process used by other powder-based technologies. The term "cleaner" does not refer to any indoor air quality requirements and/or consider related air quality regulations or testing that may be applicable.
- 10. Compared to PA 12 materials available as of June, 2017. HP Jet Fusion 3D Printing Solutions using HP 3D High Reusability CB PA 12 provide up to 80% powder reusability ratio, producing functional parts batch after batch.
- 11. Printing supplies eligible for recycling vary by printer. Visit <u>hp.com/recycle</u> to see how to participate and for HP Planet Partners program availability; program may not be available in your area. Where this program is not available, and for other consumables not included in the program, consult your local waste authorities on appropriate disposal.

© Copyright 2018, 2019 HP Development Company, L.P.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.



This is an HP Indigo digital print.